



2820 S. English Station Road - Louisville, KY 40299

ASHRAE Standard 52.2-99 TEST REPORT

FULL TEST

Filter Description	Manufacturer <u>Leggett & Platt, Cumulus Fibres Division</u> Filter Model <u>Unknown</u> Part Number <u>Unknown</u> Filter Type <u>1.25" Super Tack</u> Filter Date Code <u>Unknown</u> Nominal Face Dimensions <u>24" x 24"</u> Nominal Depth <u>1.25"</u> Pocket / Pleat Quantity <u>Flat</u> Media Type <u>Polyester</u> Est. Gross Media Area <u>4 ft2</u> Adhesive Type <u>Super Tack</u> Adhesive Amount <u>Unknown</u>	
Internal Use	Open Market <u> </u> Experimental <u> </u> Quality Control <u> </u> X Standard <u> </u>	UL Class <u> </u> Not Rated <u> </u> Not Known <u> </u> X
Test Conditions	Test Air Flow Rate (CFM) <u> </u> 1200 Dust Feed Rate (gms / MCF) <u> </u> 2/1000 Dust Type <u> </u> ASHRAE Test Duct Number <u> </u> 3	Test Air Temp (degrees F.) <u> </u> 77.28 Relative Humidity (%) <u> </u> 19.87 Barometric Pressure (In. Hg.) <u> </u> 30.35
Test Results	Initial Resistance (in, W.G.) Final Resistance (in, W.G.) Dust Fed to Final Resistance	<u> </u> 0.33 <u> </u> 1 <u> </u> 130 gms
	E1 Minimum Average Efficiency 0.3-0.84 Microns E2 Minimum Average Efficiency 1.14-2.57 Microns E3 Minimum Average Efficiency 3.46-8.37 Microns Minimum Efficiency Rating Value (MERV)	<u> </u> 6 <u> </u> 52 <u> </u> 72 <u> </u> MERV 8 @ 1200 CFM
Comments		
Requestor Information	Test Requestor <u> </u> Shawn Tanner Company Name <u> </u> Leggett & Platt, Cumulus Company Address <u> </u> Charlotte, NC	Phone Number <u> </u> 704-394-2111 Fax Number <u> </u> 704-394-2650 Date Requested <u> </u> 4-May-05
Test Operator Information	Test Performed by: <u> </u> Mike McLain	Completion Date <u> </u> 6-May-05

BLUE HEAVEN TECHNOLOGIES


ASHRAE 52.2 REPORT

2820 S. ENGLISH STATION ROAD
LOUISVILLE, KY 40299

TEL: (502) 357-0132
FAX: (502) 267-8379

Test Number:	05-213	Filter Test Date	6-May-05
--------------	--------	------------------	----------

Size Range (μm)	Composite Minimum Fractional Efficiency
0.35	0.0
0.47	0.0
0.62	6.1
0.84	17.2
1.14	38.4
1.44	48.1
1.88	57.5
2.57	66.1
3.46	72.1
4.69	73.8
6.20	74.0
8.37	68.0

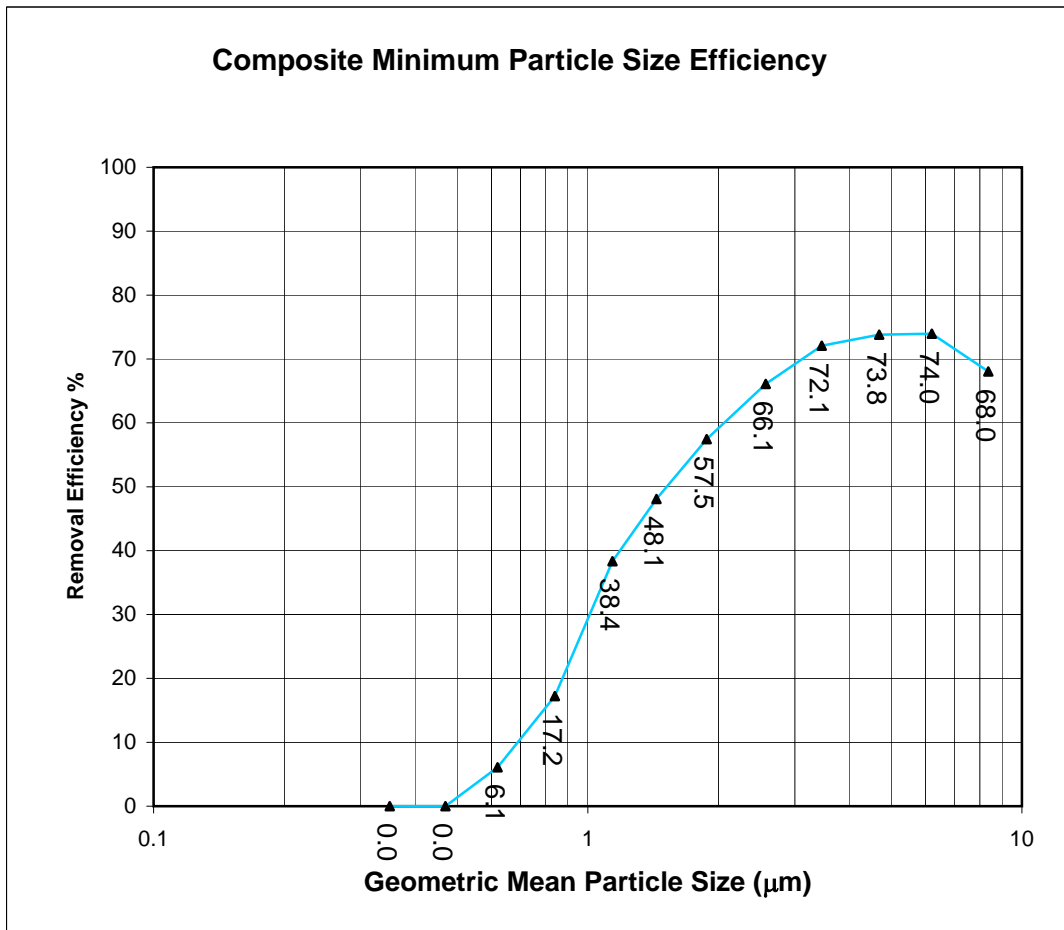


BLUE HEAVEN TECHNOLOGIES

ASHRAE 52.2 TEST REPORT

2820 S. ENGLISH STATION ROAD
LOUISVILLE, KY 40299

TEL: (502) 357-0132
FAX: (502) 267-8379

Test Number:	05-213	Filter Test Date	6-May-05
--------------	--------	------------------	----------

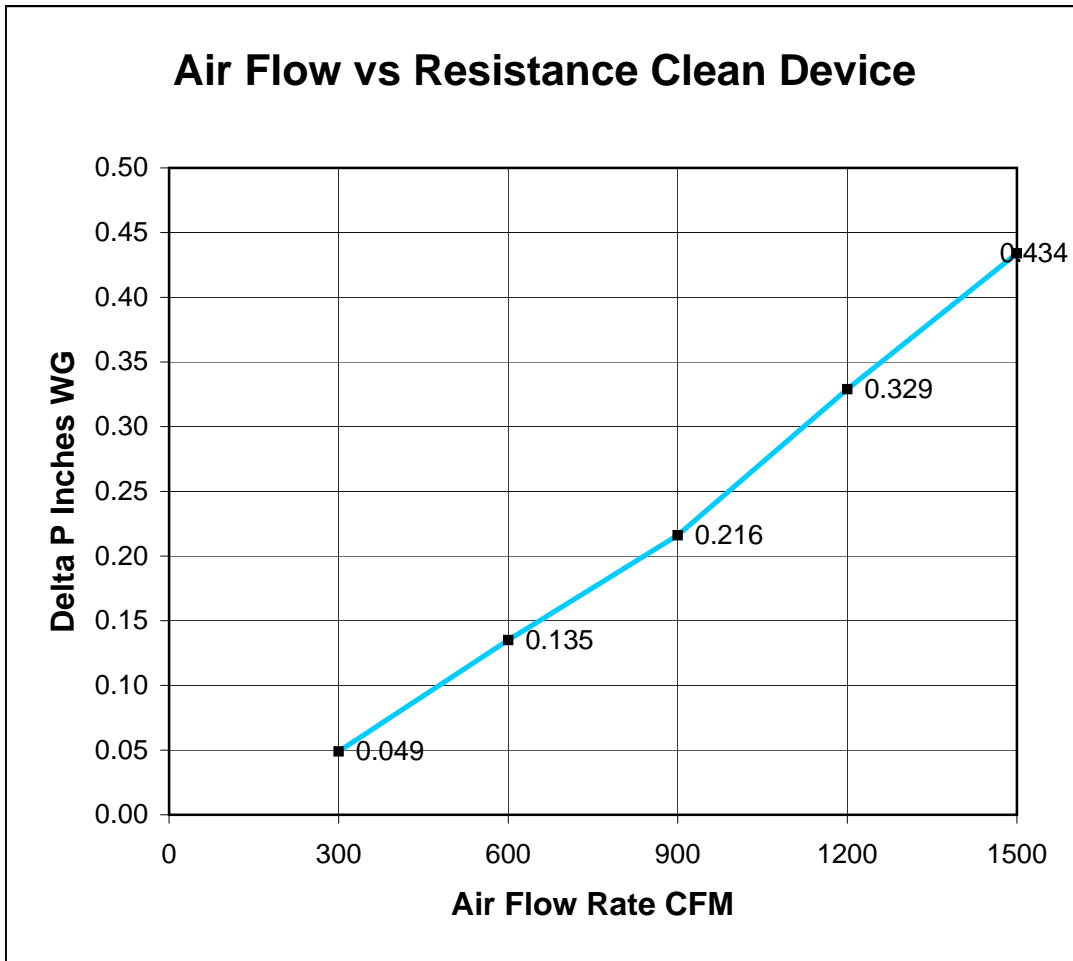


Flow Rate (cfm)	DP Inches of H2O
300	0.049
600	0.135
900	0.216
1200	0.329
1500	0.434

BLUE HEAVEN TECHNOLOGIES
ASHRAE 52.2 TEST REPORT

2820 S. English Station Road
Louisville, KY 40299

Tel: (502) 357-0132
Fax: (502) 267-8379

Test Number:	05-213	Filter Test Date	6-May-05
--------------	--------	------------------	----------

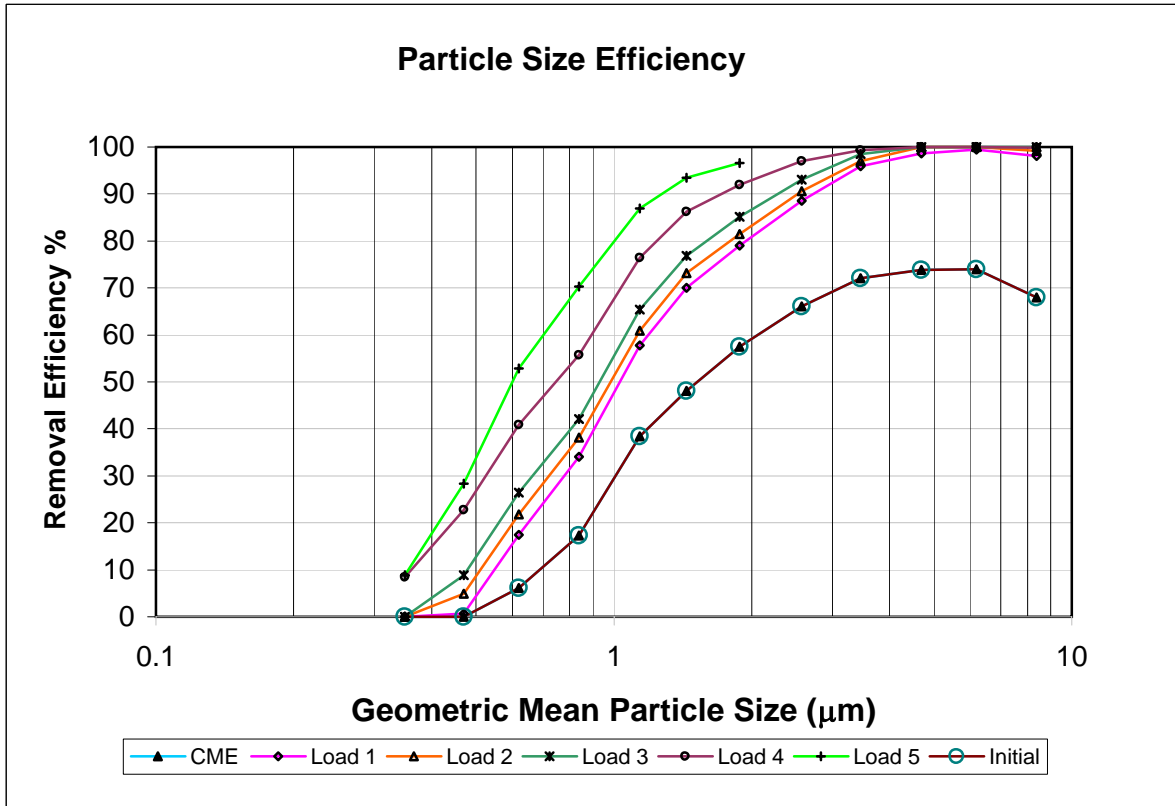

Size Range (µM)	Fractional Efficiency (%)						
	CME	Initial	Load 1	Load 2	Load 3	Load 4	Load 5
0.35	0.0	0.0	0.0	0.0	0.0	8.5	8.9
0.47	0.0	0.0	0.6	4.9	8.9	22.8	28.4
0.62	6.1	6.1	17.5	21.8	26.4	40.9	52.8
0.84	17.2	17.2	34.1	38.1	42.1	55.8	70.4
1.14	38.4	38.4	57.7	60.8	65.5	76.5	86.9
1.44	48.1	48.1	70.0	73.1	76.9	86.2	93.5
1.88	57.5	57.5	79.0	81.4	85.2	92.0	96.6
2.57	66.1	66.1	88.6	90.6	93.0	97.0	99.2
3.46	72.1	72.1	95.9	97.0	98.6	99.4	100.0
4.69	73.8	73.8	98.7	100.0	100.0	100.0	98.7
6.20	74.0	74.0	99.5	100.0	100.0	100.0	98.4
8.37	68.0	68.0	98.0	99.2	100.0	99.9	98.2
	CME	Initial	Load 1	Load 2	Load 3	Load 4	Load 5
			0.39	0.44	0.54	0.77	1.02
			10 grams	20 grams	50 grams	85 grams	130 grams